




TAPCON XTREM

zinc coated & stainless steel version 1/5

Concrete screw anchor
for use in cracked and
non-cracked concrete

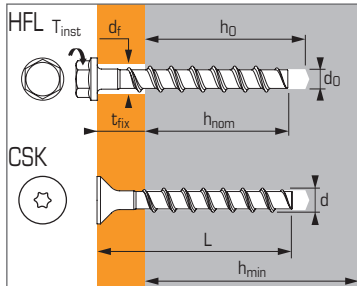

Technical data

Versions	Anchor size	Minimum embedment depth				Maximum embedment depth				Thread Ø	Drilling Ø	Total anchor length L	Tighten torque T _{inst} (Nm)	Code
		Embed. depth min.	Max. thick. of part to be fixed	Drilling depth	Min. thick. of base material	Embed. depth max.	Max. thick. of part to be fixed	Drilling depth	Min. thick. of base material					
		(mm) h _{nom}	(mm) t _{fix}	(mm) h ₀	(mm) h _{min}	(mm) h _{nom}	(mm) t _{fix}	(mm) h ₀	(mm) h _{min}					

Zinc coated versions

HFL	8X50/5	45	5	55	100	-	-	-	-	10,6	8	50	*	058733
	8X60/15		15			-	-	-	-			60		058734
	8X70/25-5		25			65	5	75	120			70		058735
	8X80/35-15		35			65	15	75	120			80		058736
	8X100/55-35		55			65	35	75	120			100		058737
	8X120/75-55		75			65	55	75	120			120		058738
	8X140/95-75		95			65	75	75	120			140		058739
	10X60/5	55	5	65	100	-	-	-	-	12,6	10	60	*	058740
	10X70/15		15			-	-	-	-			70		058741
	10X90/35-5		35			85	5	95	130			90		058742
	10X100/45-15		45			85	15	95	130			100		058743
CSK	10X120/65-35	65	65	75	120	85	35	95	130	14,6	12	120	*	058744
	10X140/85-55		85			85	55	95	130			140		058745
	10X160/105-75		105			85	75	95	130			160		058746
	12X80/15		15			-	-	-	-			80		058747
	12X110/45-10	75	45	85	130	100	10	110	150	16,6	14	110	*	058748
	14X80/5		5			-	-	-	-			80		058766
	14X110/35		35			-	-	-	-			110		058767
	14X130/55-15		55			115	15	125	170			130		058768
	14X150/75-35	45	75	55	100	115	35	125	170	10,6	8	150	*	058769
	8X80/35-15		35			65	15	75	120			80		058778

Stainless steel A4 versions

HFL	8X70/25-5	45	25	55	100	65	5	75	120	10,6	8	70	*	058809
	8X80/35-15		35			65	15	75	120			80		058810
	10X90/35-5	55	35	65	100	85	5	95	130	12,6	10	90	*	058811
	10X100/45-15		45			85	15	95	130			100		058812
	10X120/65-35		65			85	35	95	130			120		058813
CSK	8X80/35-15	45	35	55	100	65	15	75	120	10,6	8	80	*	058814
	10X90/35-5	55	35	65	100	85	5	95	130	12,6	10	90	*	058815

* Stop tightening immediately when it meets the part to be fixed

APPLICATION

- Channel, cable tray
- Brackets
- E-Clips, cowhorn
- TRH clip, rod hanging
- Trunking
- Push-pull bars
- Formwork / shuttering

MATERIAL

Zinc coated steel version:

Min. tensile strength: 700 N/mm²

HFL version:

Zinc flake coating 5 µm, EN ISO 10683

Salt spray: 500 hours

CSK version:

Min. zinc coated steel 5 µm


Stainless steel version:

Min. tensile strength: 700 N/mm²

HFL&CSK versions:

Stainless steel A4

INSTALLATION

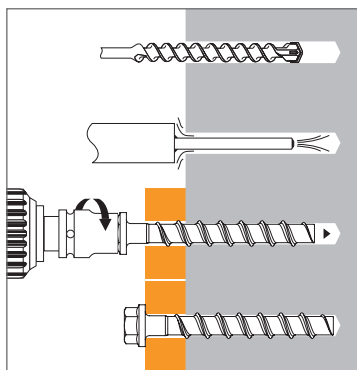

Anchor mechanical properties

Anchor size		Ø8	Ø10	Ø12	Ø14
Zinc coated & A4					
As (mm ²)	Stressed cross-section	39,6	65,0	97,7	134,0
W _{el} (mm ³)	Elastic section modulus	35,1	74,0	134,0	220,0
M ⁰ _{rk,s} (Nm)	Characteristic bending moment	26,0	56,0	123,0	200,0
M (Nm)	Recommended bending moment	13,0	28,0	61,5	100,0

TAPCON XTREM

2/5 zinc coated & stainless steel version



The loads specified on this page allow judging the product's performances, but cannot be used for the designing.
The data given in the pages "CC method" have to be applied (3/5 to 5/5).

Characteristic loads (N_{Rk}, V_{Rk}) in kN

Mean Ultimate loads are derived from test results in admissible service conditions, and characteristic loads are statistically determined.

TENSILE

Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Non-cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rk}	7,5	9,0	16,0	22,3
h _{nom,max}	65	85	100	115
N _{Rk}	16,0	25,0	36,1	44,6
Cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rk}	5,0	5,0	12,0	15,9
h _{nom,max}	65	85	100	115
N _{Rk}	12,0	20,2	25,8	31,8

SHEAR

Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Cracked & non-cracked concrete (C20/25)				
V _{Rk}	18,0	34,0	42,0	64,0

Mechanical anchors

Design loads (N_{Rd}, V_{Rd}) for one anchor without edge or spacing influence in kN

$$N_{Rd} = \frac{N_{Rk}^*}{\gamma_{Mc}}$$

*Derived from test results

$$V_{Rd} = \frac{V_{Rk}^*}{\gamma_{Ms}}$$

TENSILE

Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Non-cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rd}	5,0	6,0	10,7	14,9
h _{nom,max}	65	85	100	115
N _{Rd}	10,7	16,7	24,1	29,7
Cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rd}	3,3	3,3	8,0	10,6
h _{nom,max}	65	85	100	115
N _{Rd}	8,0	13,5	17,2	21,2

γ_{Mc} = 1,5

SHEAR

Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Cracked & non-cracked concrete (C20/25)				
V _{Rd}	12,0	22,7	28,0	42,7

γ_{Ms} = 1,5

Recommended loads (N_{rec}, V_{rec}) for one anchor without edge or spacing influence in kN

$$N_{rec} = \frac{N_{Rk}^*}{\gamma_M \cdot \gamma_F}$$

*Derived from test results

$$V_{rec} = \frac{V_{Rk}^*}{\gamma_M \cdot \gamma_F}$$

TENSILE

Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Non-cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rec}	3,6	4,3	7,6	10,6
h _{nom,max}	65	85	100	115
N _{Rec}	7,6	11,9	17,2	21,2
Cracked concrete (C20/25)				
h _{nom,min}	45	55	65	75
N _{Rec}	2,4	2,4	5,7	7,6
h _{nom,max}	65	85	100	115
N _{Rec}	5,7	9,6	12,3	15,1

γ_{Mc} = 1,5; γ_F = 1,4

SHEAR


Anchor size	Ø8	Ø10	Ø12	Ø14
Zinc coated & A4				
Cracked & non-cracked concrete (C20/25)				
V _{rec}	8,6	16,2	20,0	30,5

γ_{Ms} = 1,5



SPIT CC Method

TENSILE in kN




→ Pull-out resistance

$$N_{Rd,p} = N_{Rd,p}^0 \cdot f_b$$

$N_{Rd,p}^0$	Design pull-out resistance			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$N_{Rd,p}^0$	5,0	6,0	10,7	-
$h_{nom,max}$	65	85	100	115
$N_{Rd,p}^0$	10,7	16,7	-	-
Cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$N_{Rd,p}^0$	3,3	3,3	8,0	-
$h_{nom,max}$	65	85	100	115
$N_{Rd,p}^0$	8,0	-	-	-

$$\gamma_{Mc} = 1,5$$




→ Concrete cone resistance

$$N_{Rd,c} = N_{Rd,c}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$N_{Rd,c}^0$	Design cone resistance			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$N_{Rd,c}^0$	7,0	9,5	11,9	14,9
$h_{nom,max}$	65	85	100	115
$N_{Rd,c}^0$	12,6	18,9	24,1	29,7
Cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$N_{Rd,c}^0$	5,0	6,8	8,5	10,6
$h_{nom,max}$	65	85	100	115
$N_{Rd,c}^0$	9,0	13,5	17,2	21,2

$$\gamma_{Mc} = 1,5$$



→ Steel resistance


$N_{Rd,s}$	Steel design tensile resistance			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
$N_{Rd,s}$	17,9	30,0	45,7	73,6

$$\gamma_{Ms} = 1,4$$

$$N_{Rd} = \min(N_{Rd,p}; N_{Rd,c}; N_{Rd,s})$$

$$\beta_N = N_{Sd} / N_{Rd} \leq 1$$

SHEAR in kN




→ Concrete edge resistance

$$V_{Rd,c} = V_{Rd,c}^0 \cdot f_b \cdot f_{\beta,V} \cdot \Psi_{S-C,V}$$

$V_{Rd,c}^0$	Design concrete edge resistance at minimum edge distance (C_{min})			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
C_{min}	40	50	50	50
S_{min}	40	50	50	50
$V_{Rd,c}^0$, non-cracked	3,2	4,6	4,9	5,1
$V_{Rd,c}^0$, cracked	2,3	3,3	3,4	3,6
Cracked concrete (C20/25)				
$h_{nom,max}$	65	85	100	115
C_{min}	50	50	70	70
S_{min}	50	50	70	70
$V_{Rd,c}^0$, non-cracked	4,6	5,0	8,3	8,8
$V_{Rd,c}^0$, cracked	3,3	3,6	5,9	6,2

$$\gamma_{Mc} = 1,5$$




→ Pryout failure

$$V_{Rd,cp} = V_{Rd,cp}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$V_{Rd,cp}^0$	Design pryout resistance			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Non-cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$V_{Rd,cp}^0$	7,0	9,5	11,9	14,9
$h_{nom,max}$	65	85	100	115
$V_{Rd,cp}^0$	12,6	37,8	48,2	59,4
Cracked concrete (C20/25)				
$h_{nom,min}$	45	55	65	75
$V_{Rd,cp}^0$	5,0	6,8	8,5	10,6
$h_{nom,max}$	65	85	100	115
$V_{Rd,cp}^0$	9,0	26,9	34,3	42,4

$$\gamma_{Mc} = 1,5$$



→ Steel resistance

$V_{Rd,s}$	Steel design shear resistance			
Anchor size Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
$V_{Rd,s}$	12,0	22,7	28,0	42,7

$$\gamma_{Ms} = 1,5$$

$$V_{Rd} = \min(V_{Rd,c}; V_{Rd,cp}; V_{Rd,s})$$

$$\beta_V = V_{Sd} / V_{Rd} \leq 1$$


$$\beta_N + \beta_V \leq 1,2$$

f_b INFLUENCE OF CONCRETE

Concrete class	f_b	Concrete class	f_b
C25/30	1,1	C40/50	1,41
C30/37	1,22	C45/55	1,48
C35/45	1,34	C50/60	1,55

$f_{\beta,V}$ INFLUENCE OF SHEAR LOADING DIRECTION


Angle β [°]	$f_{\beta,V}$
0 to 55	1
60	1,1
70	1,2
80	1,5
90 to 180	2





SPIT CC Method

Ψ_S INFLUENCE OF SPACING FOR CONCRETE CONE RESISTANCE IN TENSILE LOAD



Ψ_S = 0,5 + $\frac{S}{6 \cdot h_{ef}}$

S_{min} < S < S_{cr,N}


S_{cr,N} = 3 · h_{ef}

Ψ_S must be used for each spacing influenced the anchors group.

SPACING S		Reduction factor Ψ _S Minimum anchor depth			
Anchor size	Ø8	Ø10	Ø12	Ø14	
40	0,69				
50	0,74	0,69	0,67	0,64	
70	0,83	0,77	0,73	0,70	
95	0,95	0,87	0,82	0,77	
105	1,00	0,91	0,85	0,80	
115		0,95	0,88	0,83	
130		1,00	0,93	0,87	
150			1,00	0,93	
175				1,00	

SPACING S		Reduction factor Ψ _S Maximum anchor depth			
Anchor size	Ø8	Ø10	Ø12	Ø14	
50	0,66	0,62			
70	0,72	0,67	0,65	0,63	
100	0,82	0,75	0,71	0,68	
130	0,92	0,82	0,77	0,74	
155	1,00	0,88	0,82	0,78	
200		1,00	0,92	0,86	
240			1,00	0,93	
275				1,00	

Ψ_{C,N} INFLUENCE OF EDGE FOR CONCRETE CONE RESISTANCE IN TENSILE LOAD



Ψ_{C,N} = 0,48 + 0,27 · $\frac{C}{h_{ef}}$

C_{min} < C < C_{cr,N}


C_{cr,N} = 1,5 · h_{ef}

Ψ_{C,N} must be used for each distance influenced the anchors group.


EDGE C		Reduction factor Ψ _{C,N} Minimum anchor depth			
Anchor size	Ø8	Ø10	Ø12	Ø14	
50	0,96	0,83	0,75	0,68	
55	1,00	0,88	0,80	0,73	
60		0,94	0,85	0,77	
65		1,00	0,89	0,81	
75			1,00	0,89	
90				1,00	

EDGE C		Reduction factor Ψ _{C,N} Maximum anchor depth			
Anchor size	Ø8	Ø10	Ø12	Ø14	
50	0,73	0,62			
65	0,87	0,73			
70	0,92	0,76	0,69	0,64	
80	1,00	0,83	0,75	0,69	
100		1,00	0,87	0,79	
120			1,00	0,90	
140				1,00	


Ψ_{S-C,V} INFLUENCE OF SPACING AND EDGE DISTANCE FOR CONCRETE EDGE RESISTANCE IN SHEAR LOAD



Ψ_{S-C,V} = $\frac{C}{C_{min}} \cdot \sqrt{\frac{C}{C_{min}}}$



Ψ_{S-C,V} = $\frac{3 \cdot C + S}{6 \cdot C_{min}} \cdot \sqrt{\frac{C}{C_{min}}}$

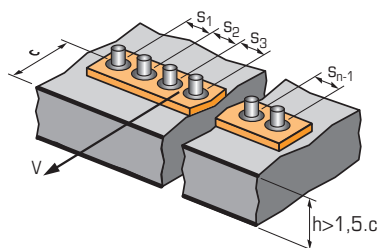

→ For single anchor fastening

		Reduction factor Ψ _{S-C,V} Cracked & non-cracked concrete											
$\frac{C}{C_{min}}$		1,0	1,2	1,4	1,6	1,8	2,0	2,2	2,4	2,6	2,8	3,0	3,2
Ψ _{S-C,V}		1,00	1,31	1,66	2,02	2,41	2,83	3,26	3,72	4,19	4,69	5,20	5,72

→ For 2 anchors fastening

		Reduction factor Ψ _{S-C,V} Cracked & non-cracked concrete											
$\frac{S}{C_{min}}$	$\frac{C}{C_{min}}$	1,0	1,2	1,4	1,6	1,8	2,0	2,2	2,4	2,6	2,8	3,0	3,2
1,0		0,67	0,84	1,03	1,22	1,43	1,65	1,88	2,12	2,36	2,62	2,89	3,16
1,5		0,75	0,93	1,12	1,33	1,54	1,77	2,00	2,25	2,50	2,76	3,03	3,31
2,0		0,83	1,02	1,22	1,43	1,65	1,89	2,12	2,38	2,63	2,90	3,18	3,46
2,5		0,92	1,11	1,32	1,54	1,77	2,00	2,25	2,50	2,77	3,04	3,32	3,61
3,0		1,00	1,20	1,42	1,64	1,88	2,12	2,37	2,63	2,90	3,18	3,46	3,76
3,5			1,30	1,52	1,75	1,99	2,24	2,50	2,76	3,04	3,32	3,61	3,91
4,0				1,62	1,86	2,10	2,36	2,62	2,89	3,17	3,46	3,75	4,05
4,5					1,96	2,21	2,47	2,74	3,02	3,31	3,60	3,90	4,20
5,0						2,33	2,59	2,87	3,15	3,44	3,74	4,04	4,35
5,5							2,71	2,99	3,28	3,71	4,02	4,33	4,65
6,0								2,83	3,11	3,41	3,71	4,02	4,33


→ For 3 anchors fastening and more

Ψ_{S-C,V} = $\frac{3 \cdot C + S_1 + S_2 + S_3 + \dots + S_{n-1}}{3 \cdot n \cdot C_{min}} \cdot \sqrt{\frac{C}{C_{min}}}$



SPIT CC Method (values issued from ETA - Seismic category C1)

TENSILE in kN




→ Pull-out resistance

$$N_{Rd,p} = N_{Rd,p}^0 \cdot f_b$$

$N_{Rd,p,C1}^0$		Design pull-out resistance			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Category C1 - Single anchor					
h_{nom}	65	85	100	115	
$N_{Rd,p,C1}^0$	8,0	-	-	-	-
Category C1 - Group of anchors ⁽¹⁾					
h_{nom}	65	85	100	115	
$N_{Rd,p,C1}^0$	6,8	-	-	-	-

⁽¹⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Mc} = 1,5$




→ Concrete cone resistance

$$N_{Rd,c} = N_{Rd,c}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$N_{Rd,c,C1}^0$		Design cone resistance			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Category C1 - Single anchor					
h_{nom}	65	85	100	115	
$N_{Rd,c,C1}^0$	7,6	11,4	14,6	18,0	
Category C1 - Group of anchors ⁽¹⁾					
h_{nom}	65	85	100	115	
$N_{Rd,c,C1}^0$	6,7	10,1	12,9	15,9	

$\gamma_{Mc} = 1,5$
⁽¹⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Mc} = 1,5$



→ Steel resistance


$N_{Rd,s,C1}$		Steel design tensile resistance			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
$N_{Rd,s,C1}$		17,9	30,0	45,7	73,6

⁽¹⁾ when more than one anchor of the group is submitted to tensile load
 $\gamma_{Ms} = 1,4$

$$N_{Rd} = \min(N_{Rd,p} ; N_{Rd,c} ; N_{Rd,s})$$

$$\beta_N = N_{Sd} / N_{Rd} \leq 1$$

SHEAR in kN




→ Concrete edge resistance

$$V_{Rd,c} = V_{Rd,c}^0 \cdot f_b \cdot f_{\beta,V} \cdot \Psi_{S-C,V}$$

$V_{Rd,c,C1}^0$		Design concrete edge resistance at minimum edge distance (C_{min})			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Category C1 - Single anchor					
h_{nom}	65	85	100	115	
C_{min}	50	50	70	70	
S_{min}	50	50	70	70	
$V_{Rd,c,C1}^0$	2,3	3,2	3,3	3,3	
Category C1 - Group of anchors ⁽¹⁾					
h_{nom}	65	85	100	115	
C_{min}	50	50	70	70	
S_{min}	50	50	70	70	
$V_{Rd,c,C1}^0$	1,9	2,7	2,8	2,8	

⁽¹⁾ when more than one anchor of the group is submitted to shear load
 $\gamma_{Mc} = 1,5$




→ Pryout failure

$$V_{Rd,cp} = V_{Rd,cp}^0 \cdot f_b \cdot \Psi_s \cdot \Psi_{c,N}$$

$V_{Rd,cp,C1}^0$		Design pryout resistance			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Category C1 - Single anchor					
h_{nom}	65	85	100	115	
$V_{Rd,cp,C1}^0$	15,3	22,9	29,2	36,0	
Category C1 - Group of anchors ⁽¹⁾					
h_{nom}	65	85	100	115	
$V_{Rd,cp,C1}^0$	13,5	20,2	25,8	31,8	

$\gamma_{Mc} = 1,5$
⁽¹⁾ when more than one anchor of the group is submitted to shear load
 $\gamma_{Mc} = 1,5$



→ Steel resistance ⁽²⁾

$V_{Rd,s,C1}$		Steel design shear resistance			
Anchor size	Zinc coated & A4	Ø8	Ø10	Ø12	Ø14
Category C1 - Single anchor					
$V_{Rd,s,C1}$		6,0	10,2	14,0	17,1
Category C1 - Group of anchors ⁽¹⁾					
$V_{Rd,s,C1}$		5,1	8,7	11,9	14,5

⁽¹⁾ when more than one anchor of the group is submitted to shear load
⁽²⁾ In case of no hole clearance between anchor and fixture
 $\gamma_{Ms} = 1,5$

$$V_{Rd} = \min(V_{Rd,c} ; V_{Rd,cp} ; V_{Rd,s})$$

$$\beta_V = V_{Sd} / V_{Rd} \leq 1$$

$$\beta_N + \beta_V \leq 1,2$$

f_b INFLUENCE OF CONCRETE

Concrete class	f_b	Concrete class	f_b
C25/30	1,1	C40/50	1,41
C30/37	1,22	C45/55	1,48
C35/45	1,34	C50/60	1,55

$f_{\beta,V}$ INFLUENCE OF SHEAR LOADING DIRECTION

Angle β [°]	$f_{\beta,V}$
0 to 55	1
60	1,1
70	1,2
80	1,5
90 to 180	2

