

# TRY-LOCK

## THE SPECIFICS

The range consists of two pre-determined lengths of wire to support basket and tray with the following choice of Safe Working Loads:

- G 10kg (on request)
- S 50kg

Designed to be used in conjunction with Rize, Zip-Lock, Con-Lock, Dec-Lock, Shot-Lock and Uni-Lock

## THE APPLICATIONS



- Suitable for suspending containment and bracketry:
- Cable Basket
  - Cable Tray
  - Channel Supports
  - Chilled Beams
  - Radiant Heat Panels

## THE TECHNICAL INFORMATION

- Reduces the use of studding and channel
- One fixing point per drop
- Allows for side loading
- Height can be adjusted at basket and not at fixing
- Can be fixed to basket at ground level
- Plastic protection sleeve preventing wire on wire friction
- 5 x 50 BZP carabineer hook
- Eyelets prevent accidental un-hooking of carabiner from wire
- High tensile galvanised wire 1960 N/mm2 grade 7 x 7 construction
- BSEN 12385 Standard

## THE INSTALLATION

- The attachment of the Try-Lock system can be done at ground level
- Clip the carabiner to one side of the basket or cable tray
- Clip the other carabiner to the other side of the basket or cable tray
- Pass the free end of the wire from your top suspension through the zip-clip in the direction of the arrow
- Pass through the plastic protected loop of the Try-Lock and back through the zip-clip allowing 15cm of wire protruding
- Legs should not exceed 60 degrees

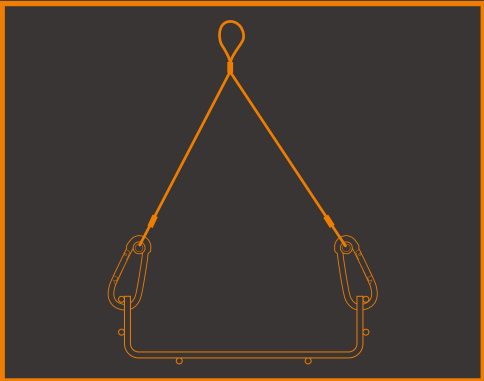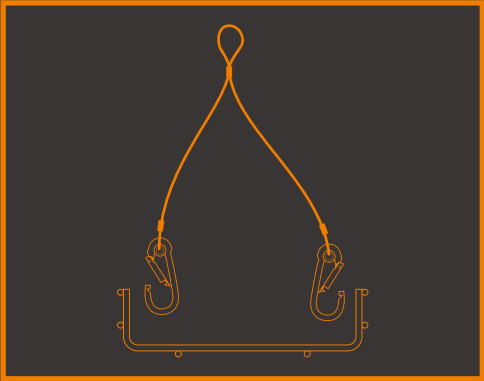

# THE RANGE

Designed to be used in conjunction with Rize, Zip-Lock, Con-Lock, Dec-Lock, Shot-Lock and Uni-Lock.

## TRY-LOCK



PRODUCT CODE	DESCRIPTION	SWL	PACK QTY.
TRS50-200	300mm eyelet carabiner suspension system	50kg	10
TRS300-400	460mm eyelet sarabiner suspension system	50kg	10

