

Features

- Innovative design simplifies installation, eliminates need for extra washers
- Integral fold-over washer and annular rib provide more strength
- Flared edges protect CPVC piping
- More space between hanger and pipe makes it easier to install and tighten nuts (see H1 dimension)
- Standard electro-galvanized finish is cleaner, provides superior corrosion protection



EPB PLUS

Loop Hanger for Steel and CPVC Pipe



The EPB PLUS Loop Hanger, part of the CADDY® line of hangers, fasteners and supports from ERICO®, is the latest innovation designed to simplify installation when hanging sprinkler piping. The EPB PLUS has an integral fold-over washer and annular stiffening rib, which eliminate the need to add washers during installation to comply with agency approval requirements. No more fumbling around on a ladder trying to install loose washers.


The flared edges on the base of the EPB PLUS Loop Hanger protect pipes by keeping them from coming into contact with any sharp edges of the hanger, making this product ideal for use with CPVC pipes.



Patent pending design



Loop Hanger for Steel and CPVC Pipe

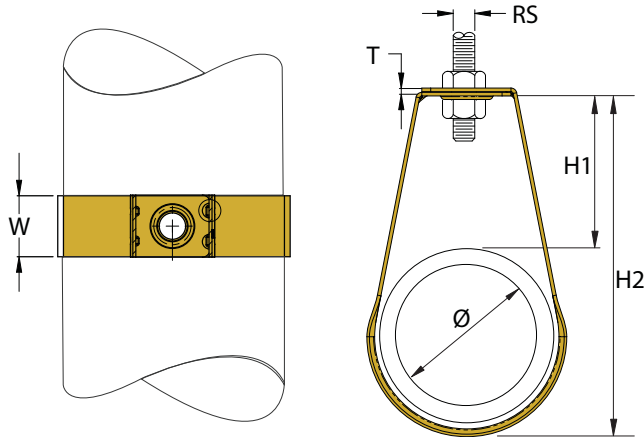

- Size range: DN 15 - DN 200 (1/2" - 8")
- Electro-zinc plated (EG) finish
- Eliminates the need to install additional washers to control deflection
- Recommended for the suspension of stationary non-insulated pipe lines
- Standard electro-zinc-plated finish is cleaner, provides superior corrosion protection

Part Number	Ø	DN	OD (mm)	Rod Size	W x T (mm)	H1 (mm)	H2 (mm)	Surface Finish	Load Capacity (N)
279500	1/2 in	15	21	M10	22 x 1.2	45	67	P1	1330
279501	3/4 in	20	27	M10	22 x 1.2	45	73	P1	1330
279502	1 in	25	34	M10	22 x 1.2	45	80	P1	1330
279503	1 1/4 in	32	43	M10	22 x 1.2	50	93	P1	1330
279504	1 1/2 in	40	48	M10	22 x 1.2	50	100	P1	1330
279505	2 in	50	60	M10	22 x 1.2	50	112	P1	1330
279506	2 1/2 in	65	76	M10	25 x 1.5	50	128	P1	2340
279507	3 in	80	89	M10	25 x 1.5	50	141	P1	2340
279508	4 in	100	113	M10	32 x 1.5	52	172	P1	2890
279509	5 in	125	139	M12	32 x 1.8	58	200	P1	2890
279511	6 in	150	165	M12	32 x 1.8	60	230	P1	4450
279512	8 in	200	219	M16	40 x 2.2	90	290	P1	6000

FM is a certification mark of FM Global Technologies.
 LPCB is a certification mark of BRE Global.
 UL is a registered trademark of Underwriters Laboratories, Inc.

WARNING
 ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright ©2009 ERICO International Corporation. All rights reserved.
 CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.